

AI-generated architectural illustration. Not a documented product or installation.

Windows

Opening systems / Material choices / Architectural possibilities

COLLECTION 01

SPIER-IN / COLLECTION

Choose how your space opens.

01	Single / Double / Tilt & turn windows	03
02	Inward & outward opening	06
03	Three / Four sash / Ribbon windows	07
04	Single & double terrace doors	10
05	Tilt & slide / Parallel slide	12
06	Bottom-hung / Manual & motorised	14
07	Lift & slide / Minimal aluminium	16
08	In-line sliding / Insect screen	18
09	Aluminium multi-track / All-glass	20
10	Folding / Left or right stacking	21
11	Materials & project specification	22



01

Single-sash casement

Finestra a un'anta apribile


A single side-hinged sash opens to provide ventilation and access to the glazed area. Choose the opening side and direction to suit the room.

CONFIGURATION

Sash dimensions, hinge side and hardware are selected for the project.

MATERIALS

PVC, aluminium or wood, subject to system compatibility.

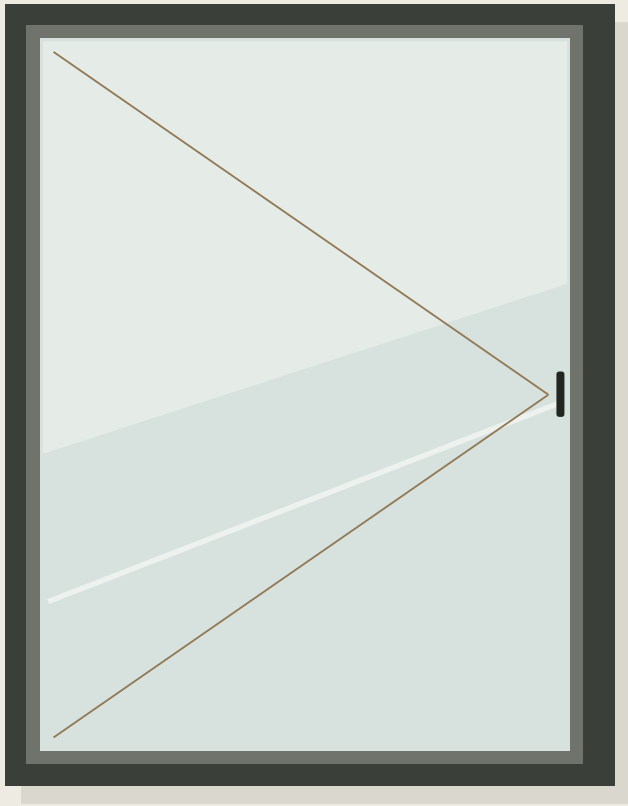

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

02

Single-sash tilt & turn

Finestra a un'anta con ribalta


One sash combines side opening with a tilted ventilation position. The two functions are controlled through compatible tilt & turn hardware.

OPERATION

Inward side opening and inward tilt ventilation.

SELECTION

Confirm handle position, restrictors and glazing weight.

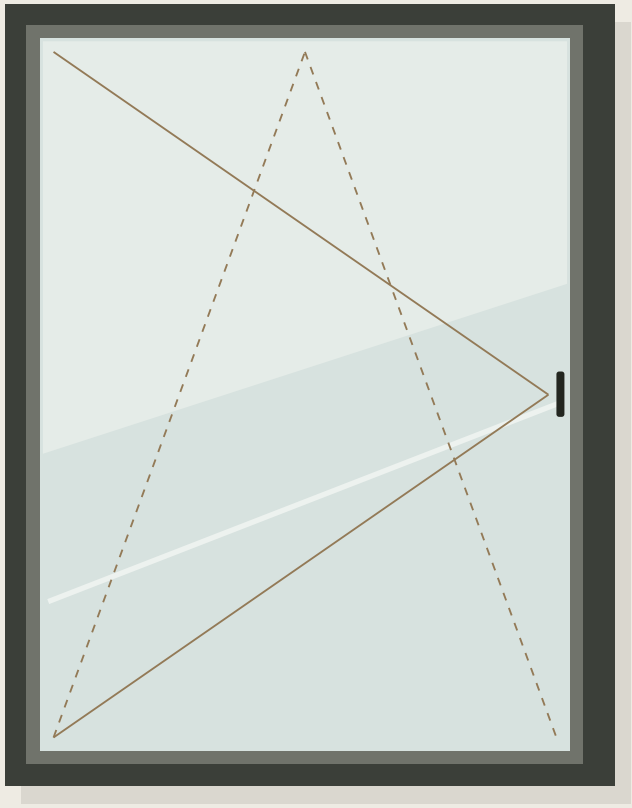

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

03

Two-sash combination

Due ante: battente + anta-ribalta


A two-sash window pairs a side-opening sash with a sash offering side opening and tilt ventilation. Opening sequence depends on the mullion and hardware arrangement.

SASH ARRANGEMENT

One casement sash + one tilt & turn sash.

CENTRE DETAIL

Fixed or floating mullion options depend on the system.

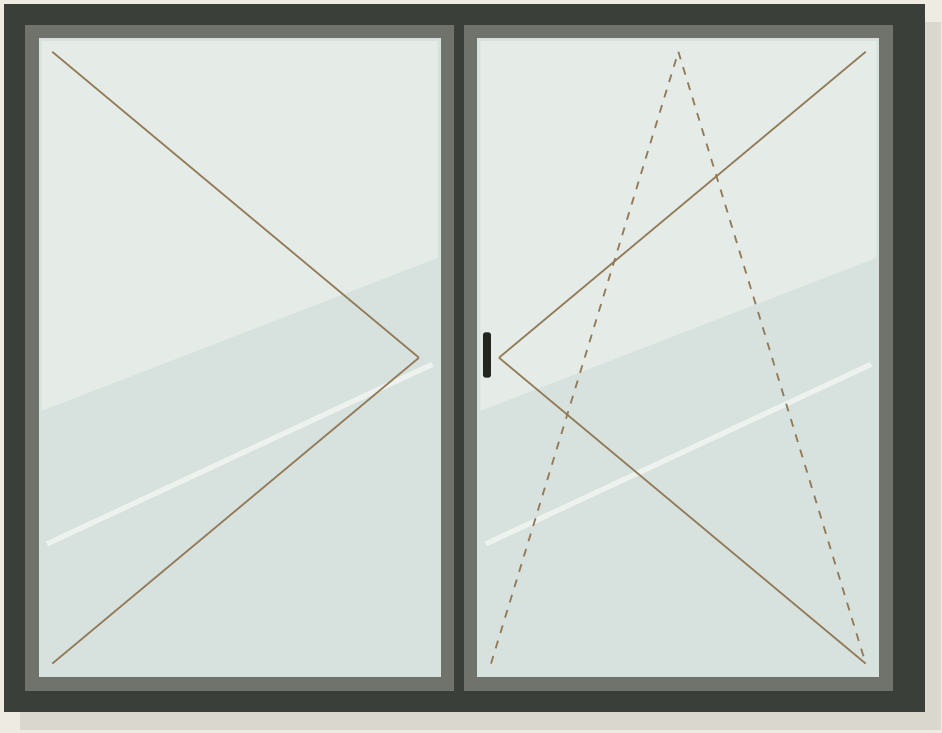


ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

A direction for every space.

Inward opening


APERTURA INTERNA

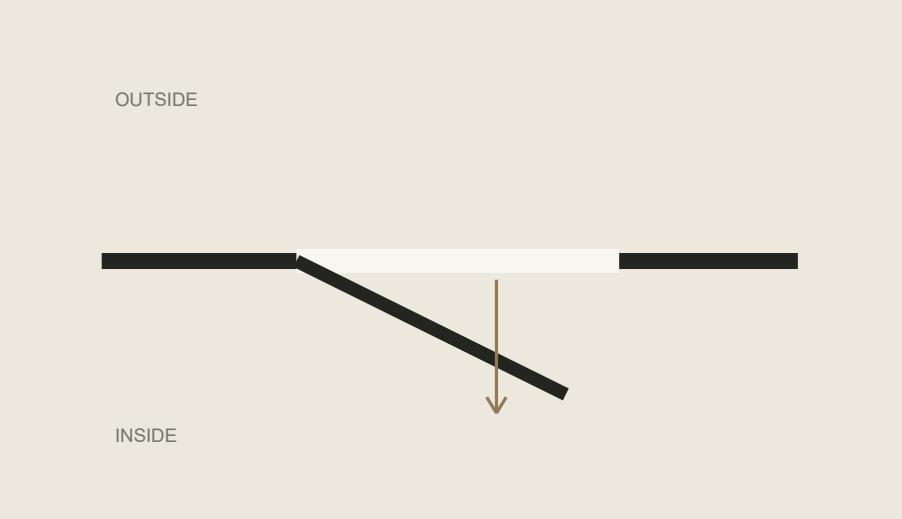

The sash opens into the room. Allow clearance for furniture, curtains and daily use.

Outward opening

APERTURA ESTERNA

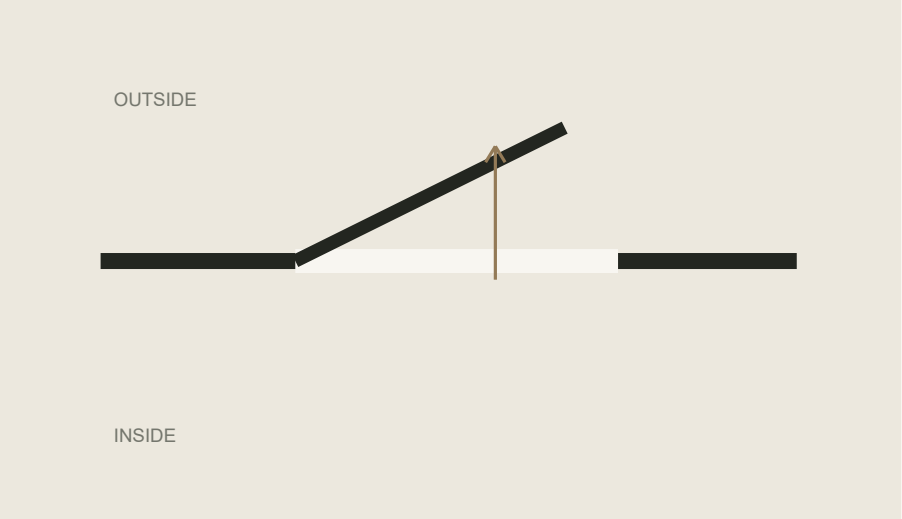

The sash opens towards the exterior. Check clearances, wind exposure and the selected outward-opening hardware.

Tilt & turn configurations normally open inward. Outward-opening casement solutions require a compatible profile and hardware system.

05

Three-sash windows

Finestre a tre ante


A wider composition divided into three opening sash positions. Fixed sections can also be considered as an alternative layout.

ILLUSTRATED EXAMPLE

Casement / casement / tilt & turn.

OTHER COMBINATIONS

Three opening sashes or mixed layouts require system checks.

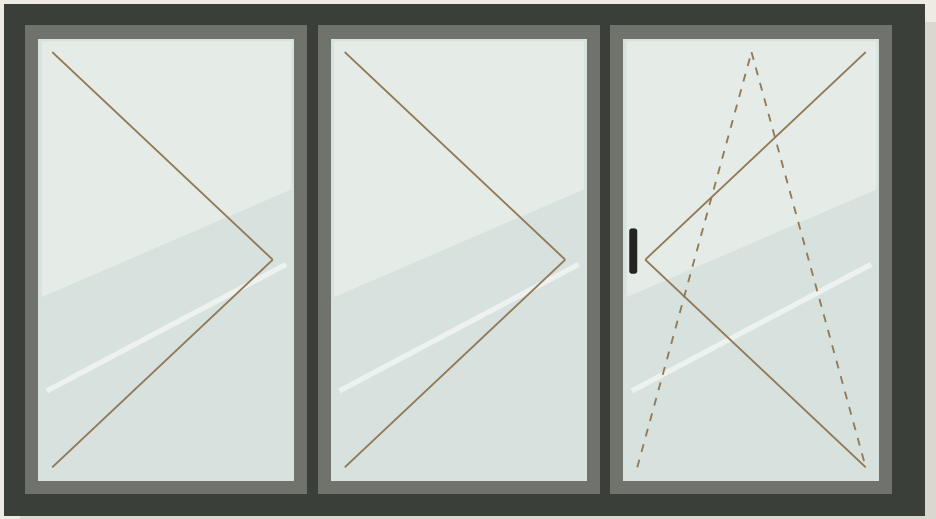

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

06

Four-sash windows

Finestre a quattro ante


Four opening sash positions create an extended window composition. Define the opening functions and sequence together with the required central divisions.

ILLUSTRATED EXAMPLE

Casement / tilt & turn / tilt & turn / casement.

PROJECT DESIGN

Opening sequence, mullions and sash sizes are configured individually.

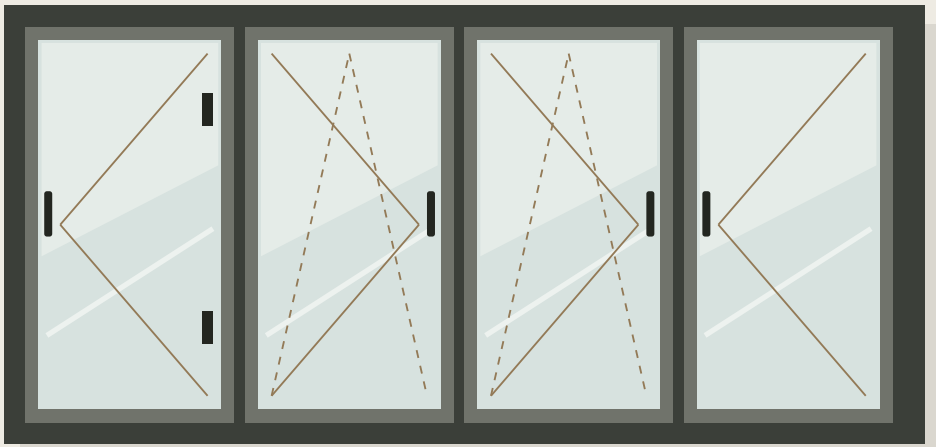

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

07

Ribbon windows

Finestre a nastro


A horizontal sequence of glazed modules brings light along a wall. The design can alternate fixed sections with opening sashes for ventilation.

LAYOUT

Continuous visual rhythm with coordinated module widths.

INTEGRATION

Connections, supports and ventilation are checked with the project team.

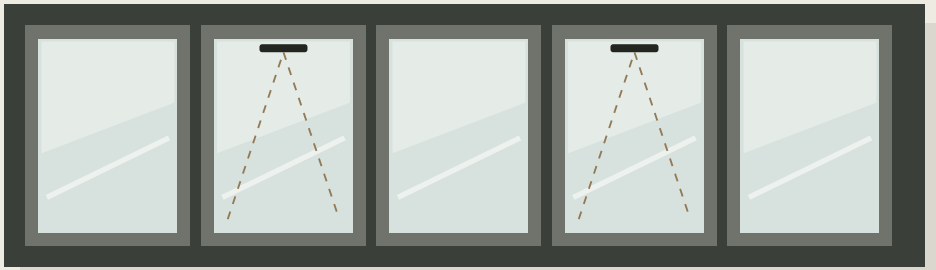

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

08

Single terrace door

Portafinestra a un'anta


A full-height glazed door connects the room to a balcony, terrace or garden. Select side opening, with a tilt function where the system permits.

ILLUSTRATED OPTION

Single inward-opening tilt & turn sash.

THRESHOLD

Height, weather sealing and accessibility are selected for the project.

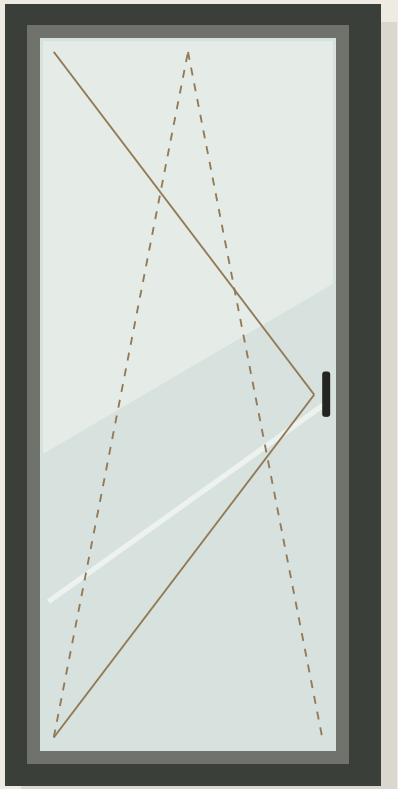

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

09

Double terrace door

Portafinestra a due ante


Two full-height glazed sashes form a wider passage. A casement and tilt & turn combination can bring access and controlled ventilation into one composition.

ILLUSTRATED OPTION

Casement secondary sash + tilt & turn main sash.

PROJECT DETAILS

Centre mullion, opening sequence and threshold depend on the system.

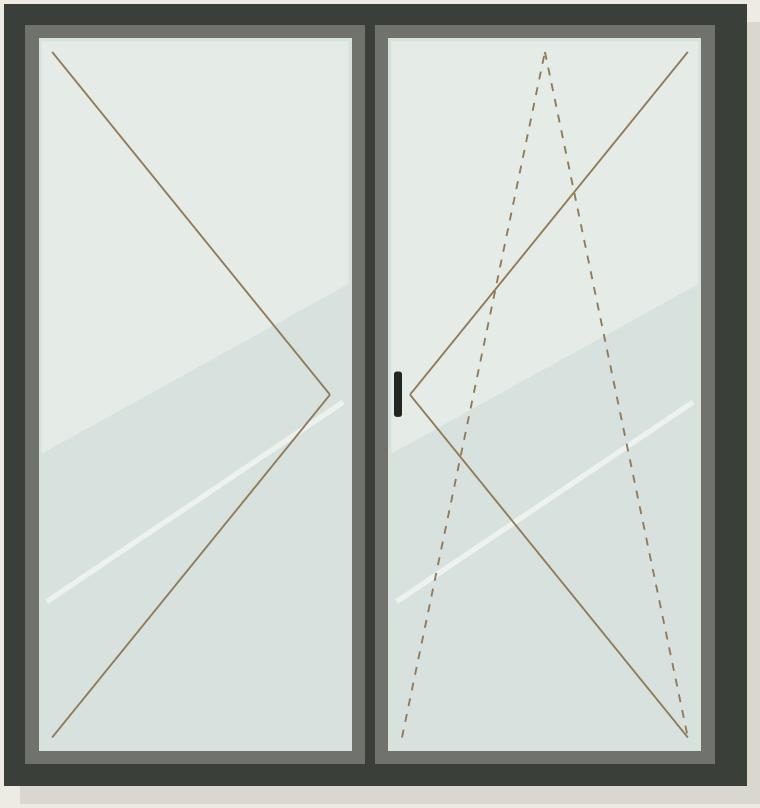

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

10

Tilt & slide

Sistema scorrevole traslante


The moving sash disengages from the frame and slides parallel to a neighbouring glazed section. A tilt position is available with suitable PSK hardware.

MOVEMENT

Disengage / slide; tilt where provided.

SPECIFICATION

Distinguish tilt & slide hardware from lift & slide systems.

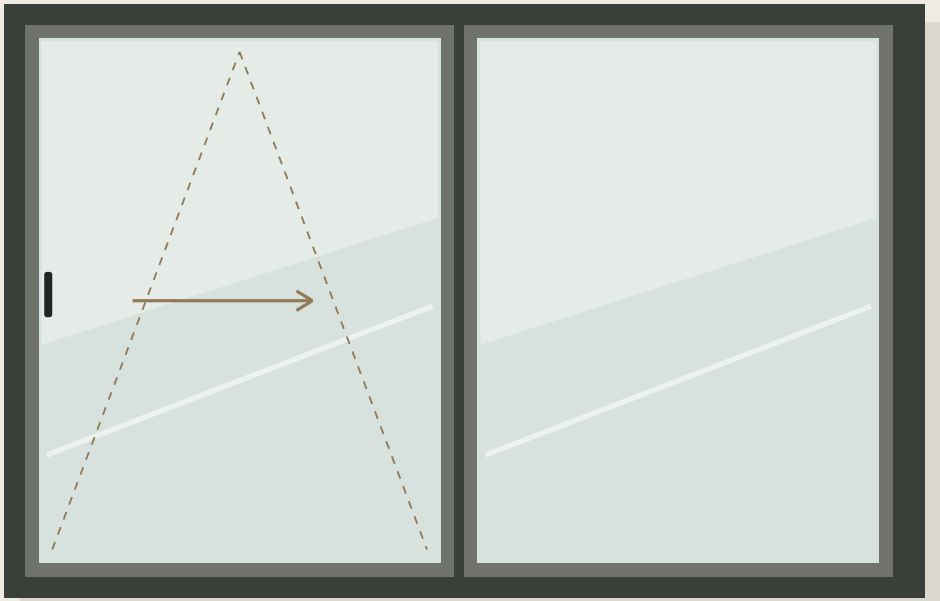

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

11

Parallel sliding systems

Sistema PASS / denominazione da confermare


A project option for a sash that moves out from the closing plane before sliding parallel to a neighbouring section. The exact PASS product and operating sequence require supplier identification.

STATUS

PASS terminology to be confirmed before publication.

IMPORTANT DETAIL

This page does not identify a particular manufacturer or proprietary mechanism.

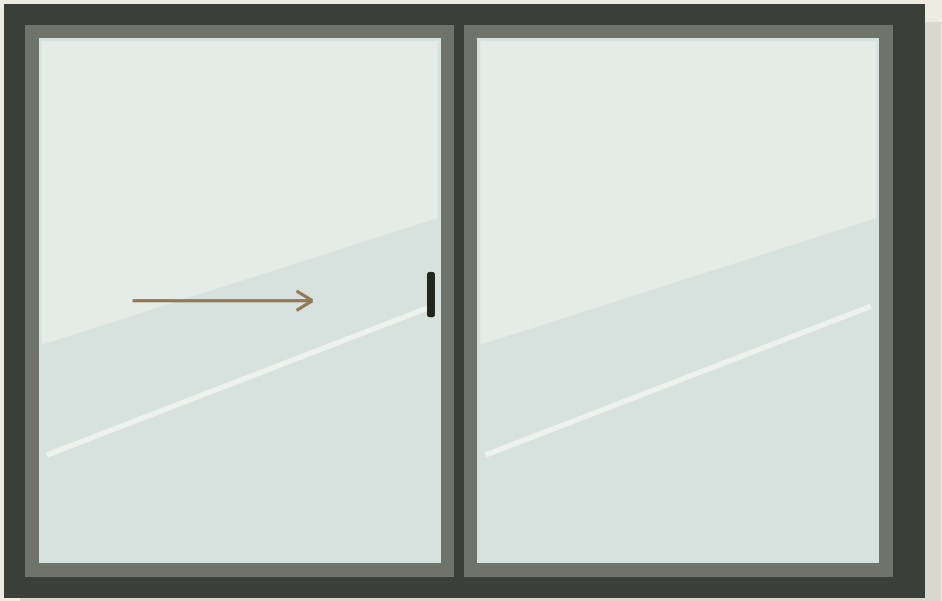

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

12

Bottom-hung. Manual.

Finestra solo vasistas / comando manuale


A bottom-hung sash tilts inward at the top for ventilation. Manual operation can use a handle or a compatible remote opener for higher locations.

OPERATION

Tilt-only ventilation; no side-opening function.

SELECTION

Confirm reachable control, opening limit and sash retention.

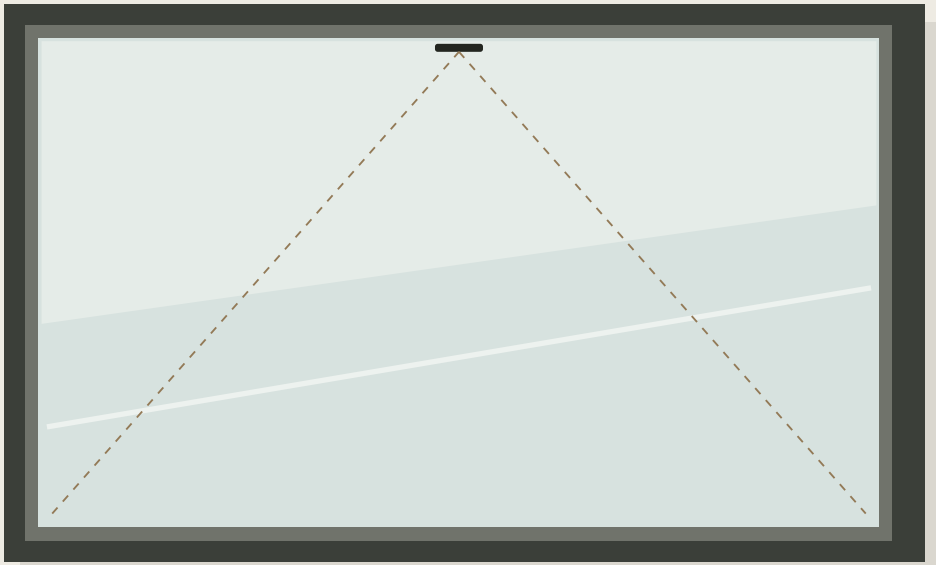

ILLUSTRATIVE ELEVATION / NOT TO SCALE

Opening symbols indicate function, not a certified product configuration.

13

Bottom-hung. Motorised.

Finestra vasistas / attuatore elettrico

A compatible electric actuator opens and closes the bottom-hung sash. Drive selection depends on sash geometry, weight and the required opening stroke.


CONTROLS

Wall control; automation and sensors where supported.

INTEGRATION

Power supply, cable routing and safe movement are coordinated with the system supplier.

ELECTRIC ACTUATOR / POSITION IS ILLUSTRATIVE

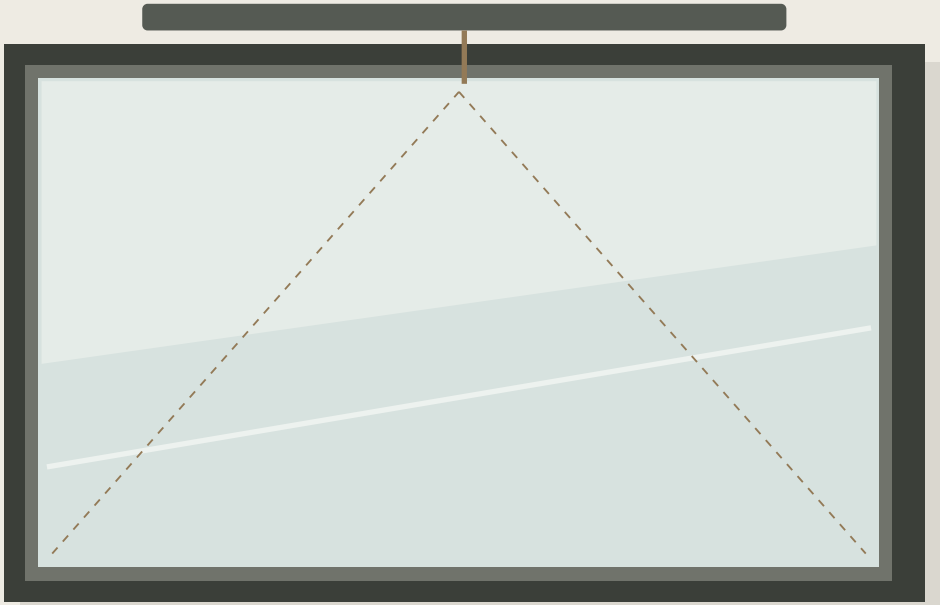

ILLUSTRATIVE ELEVATION / NOT TO SCALE


Opening symbols indicate function, not a certified product configuration.

Lift. Slide. Open.


SCORREVOLE ALZANTE / PVC / ALLUMINIO / LEGNO

The handle activates a lifting mechanism that releases the moving sash for sliding. Closing lowers the sash into its sealing position. Available in PVC, aluminium and wood with compatible systems.

Two panes / one moving + one fixed

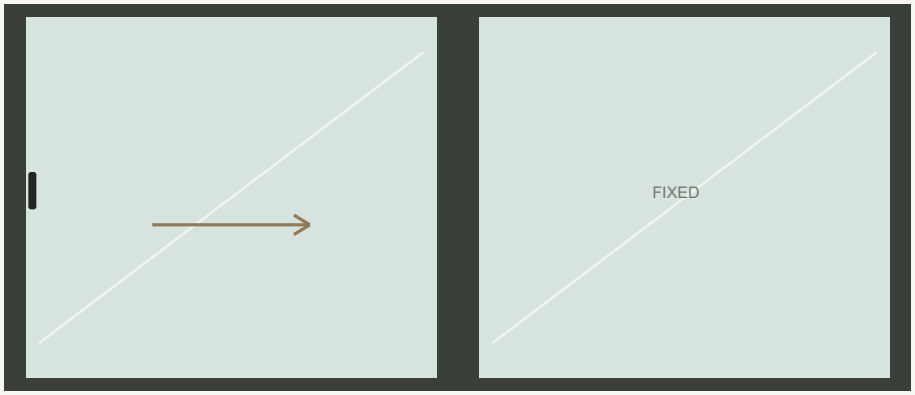

Four panes / central opening

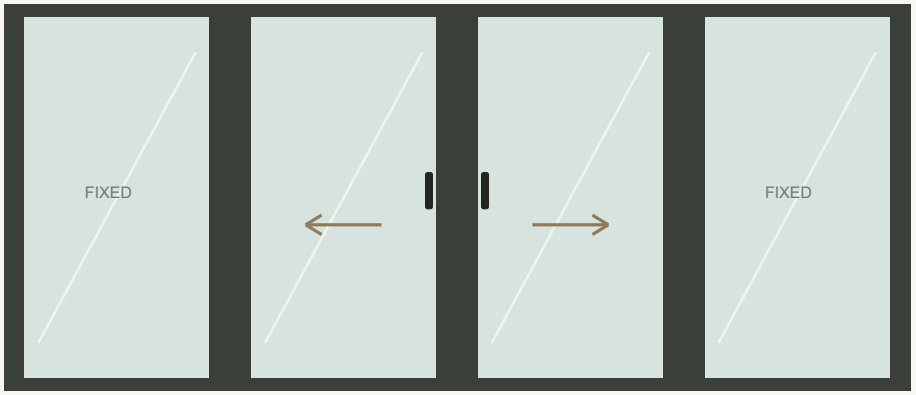

TWO PANES One fixed pane and one sash that lifts and slides in front of it.

FOUR PANES Two central moving sashes with one fixed pane at each outer side.


Illustrative configurations / arrows show movement / not to scale. System availability is confirmed for the project.

Less frame. More view.


SCORREVOLE MINIMAL IN ALLUMINIO

Slender visible profiles and perimeter frames concealed in the wall, ceiling or floor can emphasise glass and daylight. Minimal aluminium describes the design; the selected system determines whether operation is sliding or lift-and-slide.

Slim profiles / two-pane arrangement

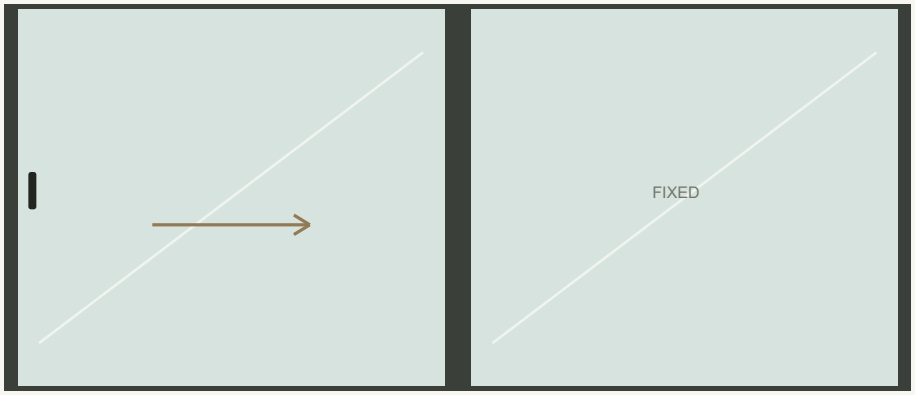

Concealed perimeter / central opening

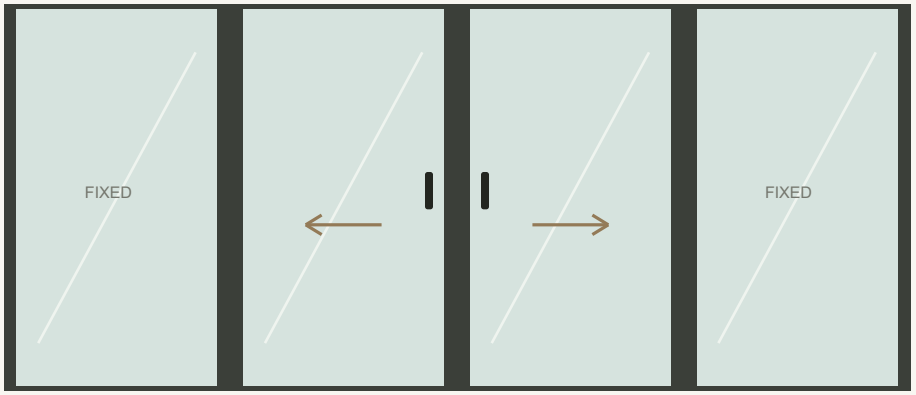

ARCHITECTURE Recessed frames are coordinated with wall finishes, threshold, drainage and access for maintenance.

APPEARANCE Reduced visible frame area; profile dimensions and concealment depend on the chosen product.


Illustrative configurations / arrows show movement / not to scale. System availability is confirmed for the project.

In-line sliding. Two or three tracks.


SCORREVOLI IN LINEA / DUE VIE / TRE VIE

Moving sashes slide laterally along parallel tracks. PVC, aluminium and wood options are selected for the required opening, panel dimensions and glazing. Track count and sash count describe different aspects of the system.

Two tracks / two moving sashes

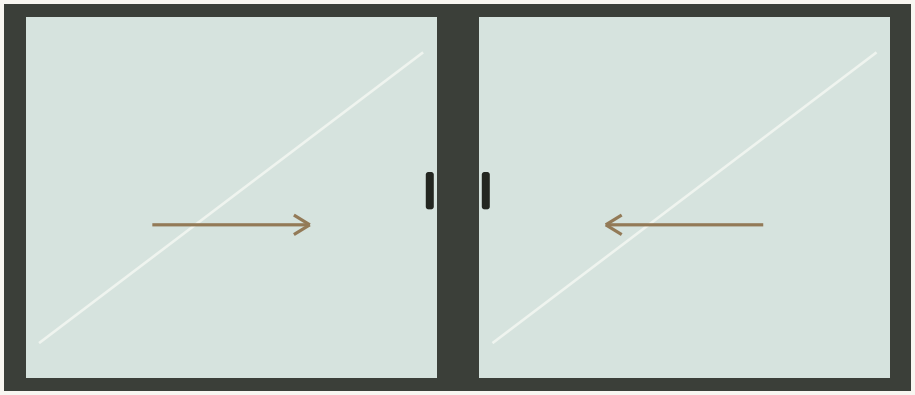

Three tracks / three moving sashes

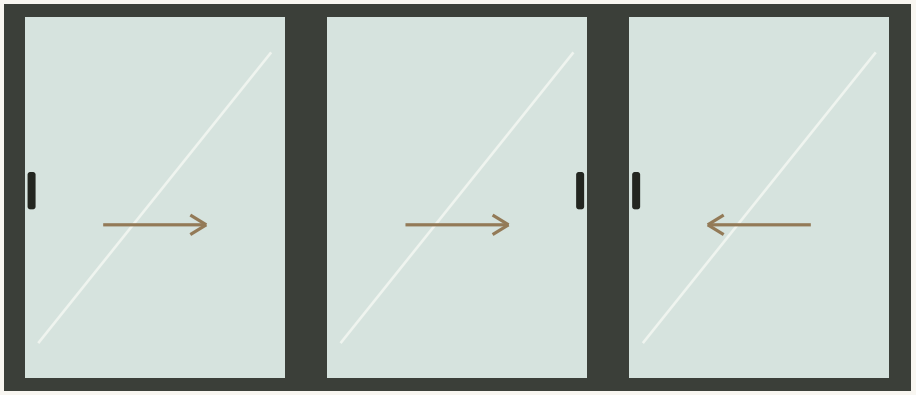

MOVEMENT Each illustrated sash is movable; panels overlap rather than opening the entire glazed width.

CONFIGURATION Parking side, overlap and clear opening are defined with the chosen profile and hardware.


Illustrative configurations / arrows show movement / not to scale. System availability is confirmed for the project.

More options. One opening.


QUATTRO ANTE APRIBILI / ZANZARIERA SCORREVOLE

In-line sliding can also use four movable sashes: two central and two lateral. A compatible two-track arrangement can include an additional dedicated track for an integrated sliding insect screen.

Two tracks + insect-screen track

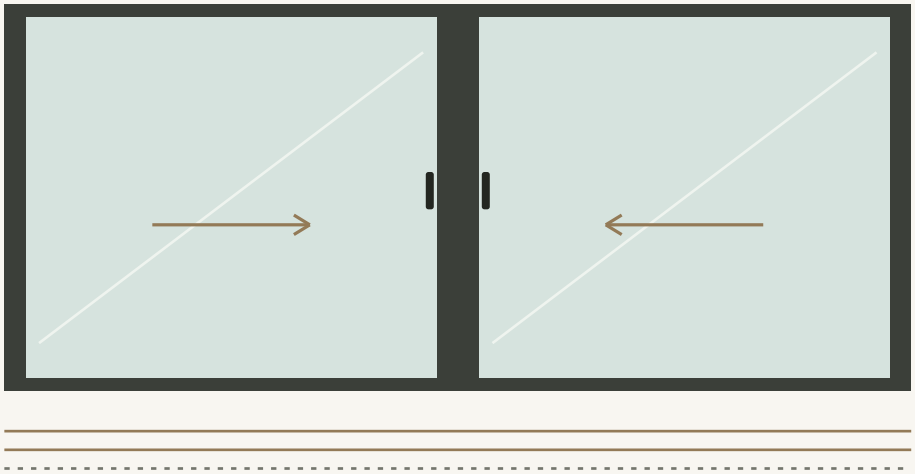

Four moving sashes / central opening

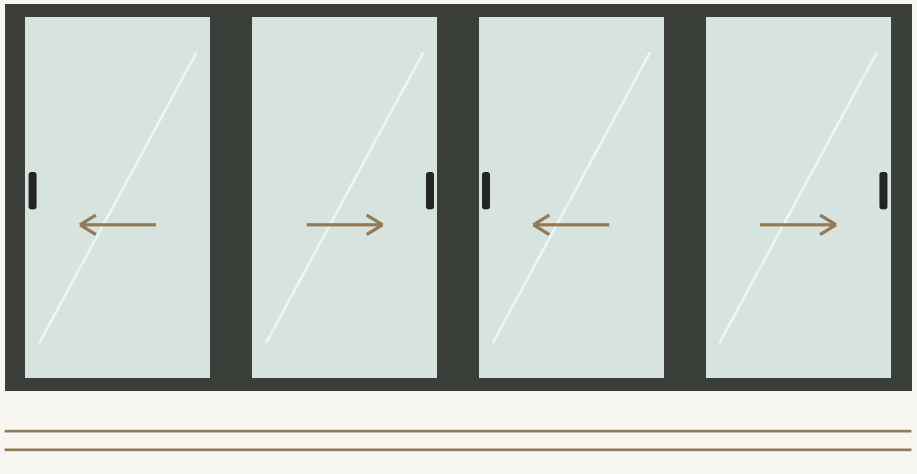

MATERIALS PVC, aluminium or wood according to system compatibility; all four illustrated sashes are movable.

INSECT SCREEN The extra screen track is separate from the glass tracks. Screen coverage and parking are system-specific.


Illustrative configurations / arrows show movement / not to scale. System availability is confirmed for the project.

Three. Four. Five tracks.


SCORREVOLI MULTIVIA / STRUTTURA IN ALLUMINIO

Aluminium multi-track systems can use three, four or five tracks, according to opening dimensions and the selected product. Options include aluminium-framed glass sashes or all-glass panels with discreet top and bottom carriers.

Three tracks / framed glass sashes

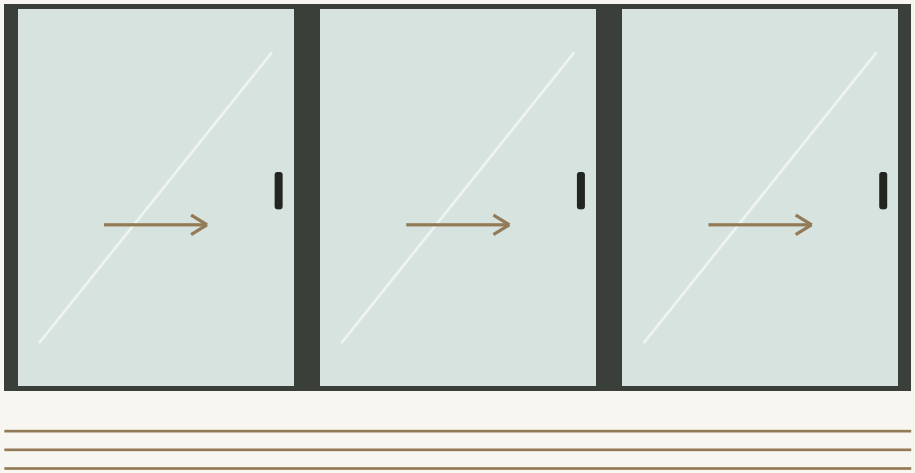

Five tracks / all-glass appearance

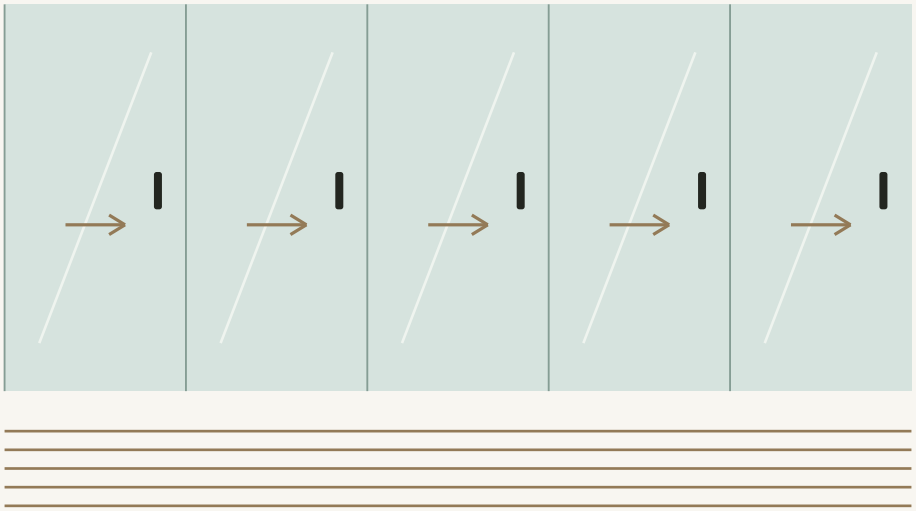

FOUR TRACKS A four-track layout is also available on project specification; panel and track counts must be coordinated.

APPLICATION All-glass terrace or balcony enclosures may be non-insulated; select an insulated system where thermal enclosure is required.


Illustrative configurations / arrows show movement / not to scale. System availability is confirmed for the project.

Fold away the boundary.


SCORREVOLE FOLDING / IMPACCHETTAMENTO A DESTRA O SINISTRA

Connected panels slide and fold into a compact stack at the left or right side. Panel number, opening direction and any independently operated access leaf are configured for the selected system.

Left-hand stack

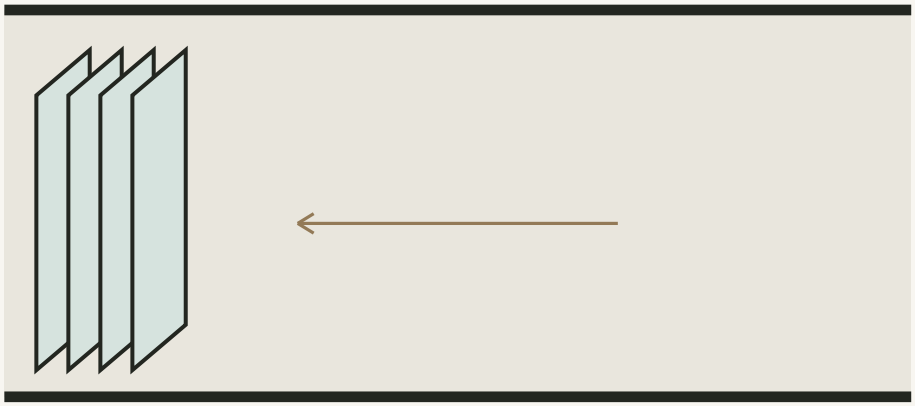

Right-hand stack

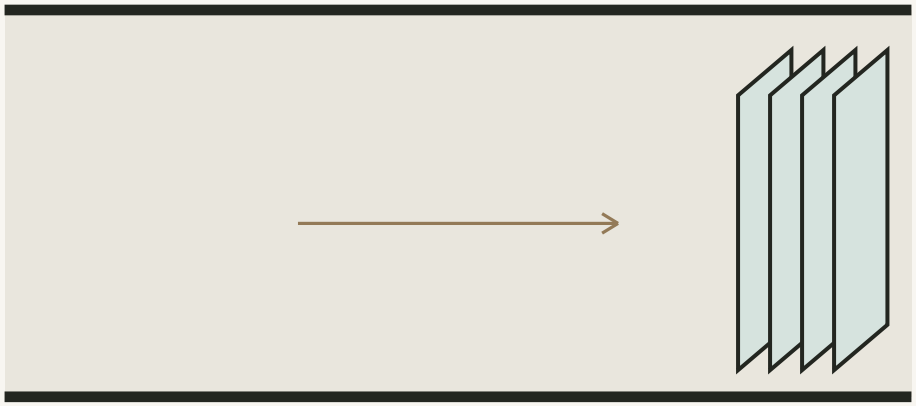

Folding is distinct from panels that simply overlap on multiple tracks. Confirm material, insulation, threshold and stack clearance with the selected folding product.

Illustrative open-position diagram / not to scale. Folding configurations and supply scope are agreed per project.

One collection. Different characters.

PVC

Versatile finishes and everyday practicality. Opening types depend on the selected profile and hardware.



Aluminium

Architectural lines and coordinated finishes. Thermal-break design and dimensions are system-specific.



Wood

Natural grain and a warm interior character. Species, finishes and care are selected for the project.

Combined wood-aluminium systems and coordinated glazing can be explored on request. Confirm material availability and opening compatibility before specifying the element.

Let's make your project real.

Share dimensions, drawings and the functions that matter to you. We will coordinate the selected material, opening configuration and glazing.

www.spierin.com

info@spierin.com

+39 333 1978 381



Illustrations are conceptual. Models, dimensions, finishes, performance and supply scope are confirmed for each project. This design proof is pending supplier validation.